Adaptec AUA-2000/3100LP/ 4000A/5100 USB2connect Adapter

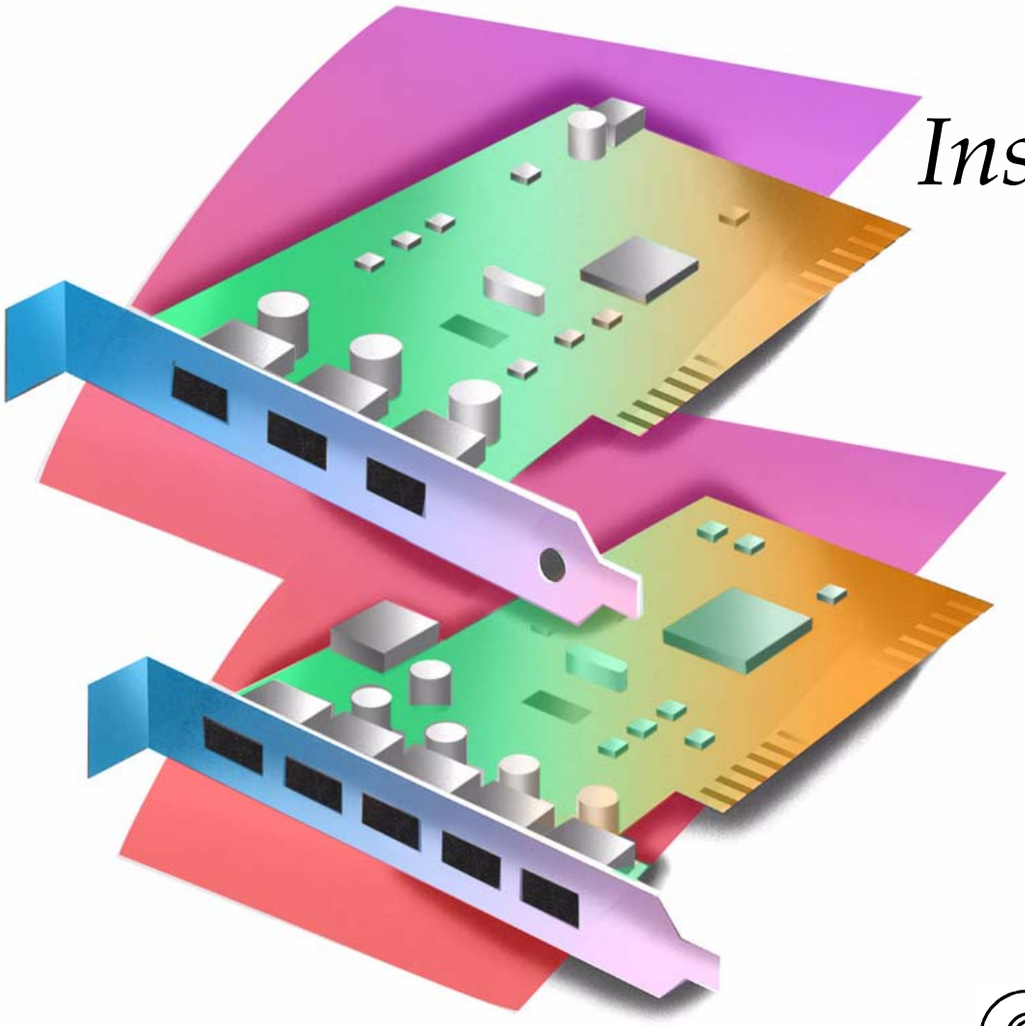

Installation Guide

adaptec®

Introduction

This *Guide* describes how to install Adaptec AUA-2000, AUA-3100LP, AUA-4000A and AUA-5100 adapters in Windows® and Macintosh® computers. These USB (Universal Serial Bus) adapters are compatible with USB 1.1 and USB 2.0 devices and work in virtually any PCI slot.

Note: Refer to the Readme file on the CD for operating system support.

The AUA-2000 and AUA-3100LP adapters are shown below.

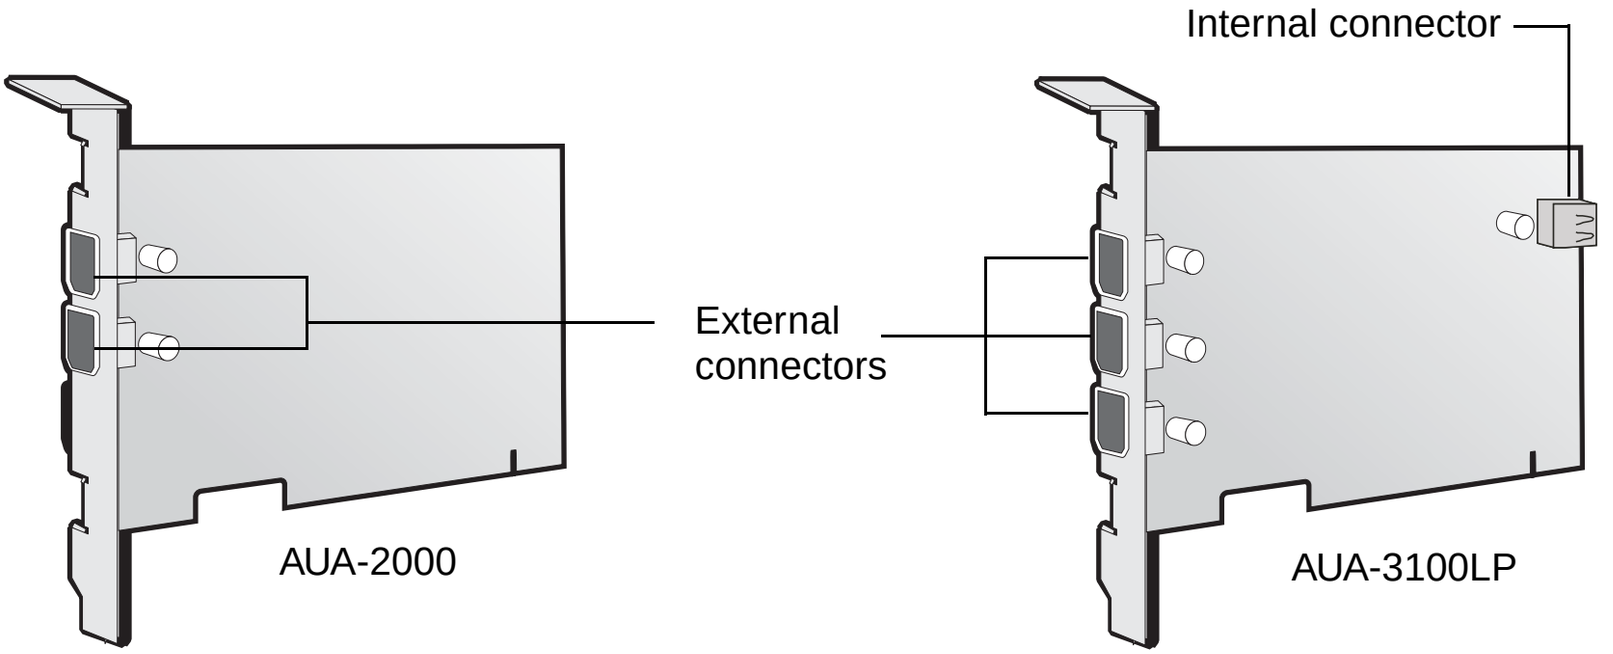

The AUA-4000A and AUA-5100 adapters are shown below.

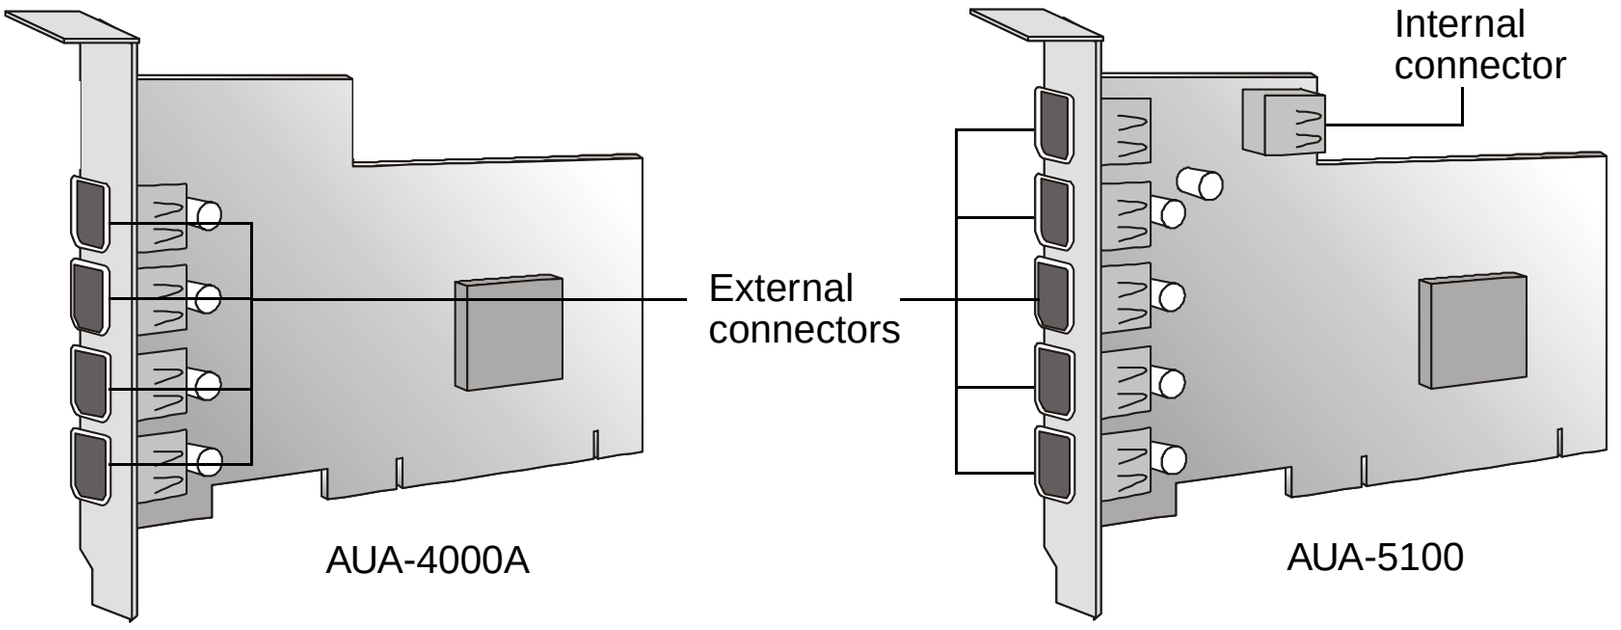

Note: The AUA-5100 has an internal USB connector (in addition to five external connectors). For details on enabling the internal connector, refer to the *USB2connect User's Guide* on the CD.

Kit Contents

If you purchased your USB2connect adapter from a retail distributor, your kit contains the following items:

- One Adaptec USB2connect adapter
- Printed *USB2connect Installation Guide*
- USB2connect CD containing:
  - *USB2connect User's Guide* in Acrobat Reader format
  - Acrobat Reader software
  - Drivers
  - Readme file
  - Low-profile bracket (AUA-3100LP kits only)

The *User's Guide* on the CD provides detailed driver installation instructions and troubleshooting tips. In addition, the *User's Guide* provides Technical Support, and Warranty information for your adapter.

Installing the USB2connect Adapter

1. Discharge any static electricity from your body by touching a grounded metal object (such as the exposed metal parts on the back of your computer) before handling the USB2connect adapter.
2. Turn off power to the computer and disconnect the power cord.
3. Open the computer cabinet. See your computer documentation for specific instructions, if needed.
4. Locate an unused 32- or 64-bit PCI expansion slot and remove the expansion slot cover. Save the slot cover screw for use in Step 6.

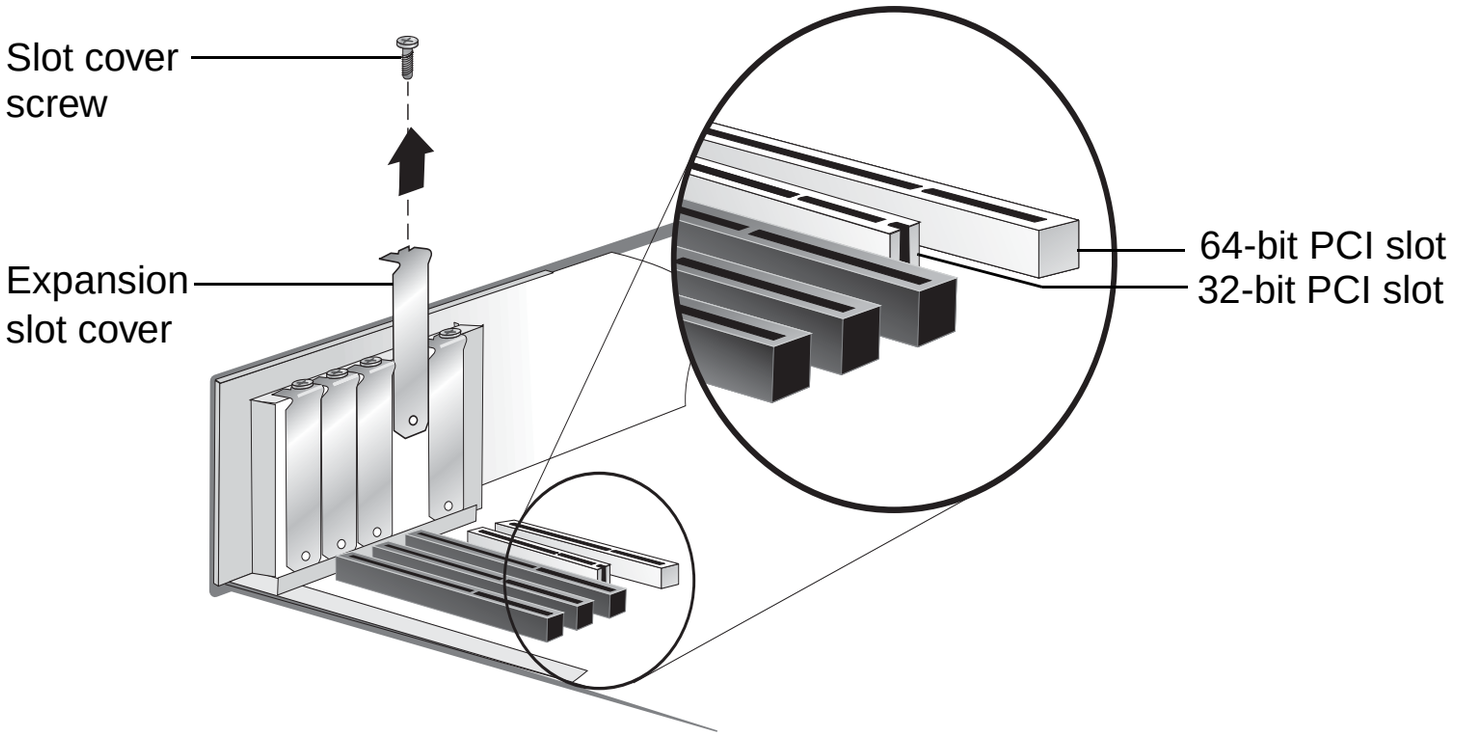

5 *Low-profile computers only*– To install the AUA-3100LP adapter in a low-profile computer, replace the existing full-height bracket with the low-profile bracket included in your kit. Remove and replace the bracket attachment screws on the adapter as shown below.

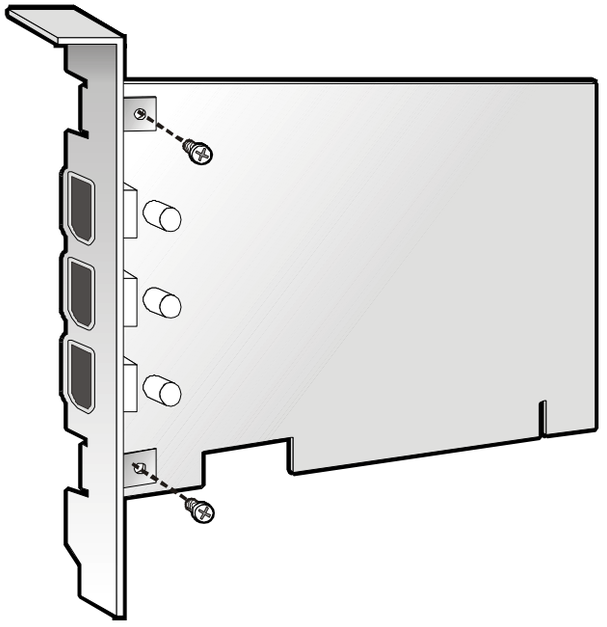

6 Insert the USB2connect adapter in the PCI expansion slot. Press the adapter firmly into the slot until it clicks into place. Replace the slot cover screw. When installed properly, the adapter should be level with the expansion slot, as shown below.

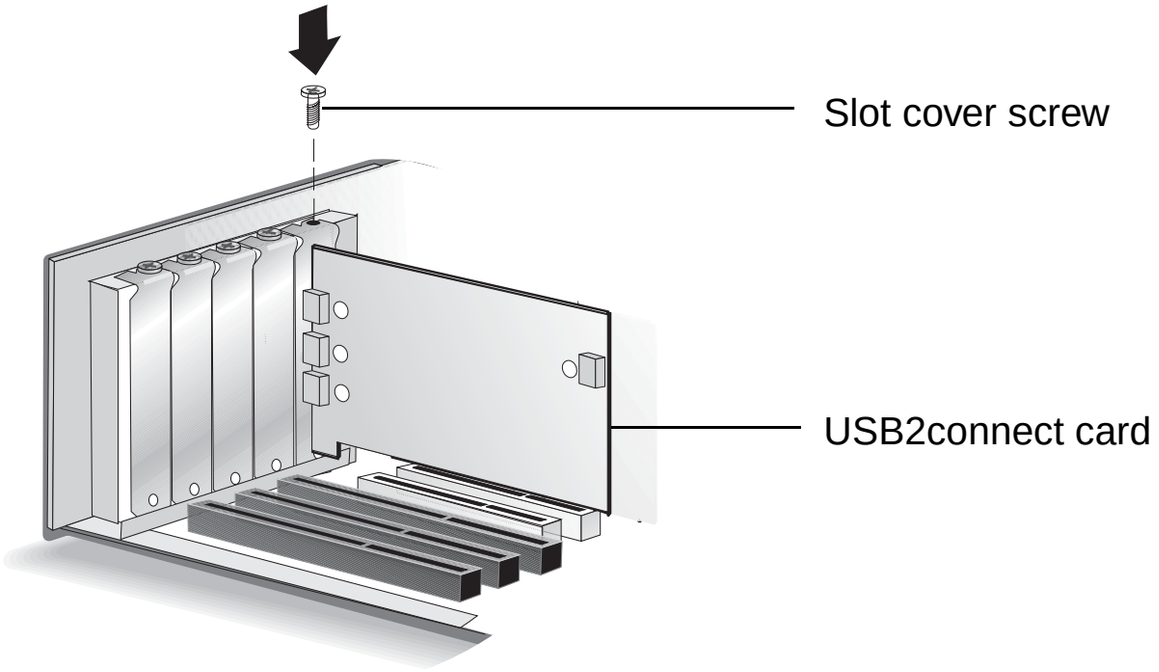

7 Close the computer cabinet and reattach the power cord.

8 Restart your computer and install drivers for your USB2connect adapter.

Adaptec, Inc.
691 South Milpitas Boulevard
Milpitas, CA 95035 USA

© 2002 Adaptec, Inc.
All rights reserved. Adaptec and the Adaptec logo are trademarks of Adaptec, Inc. which may be registered in some jurisdictions.

Part Number: 513288-06, Ver. AA LB 07/02